

Recessed downlights 2011



Recessed downlights

This product line sets itself apart by using SMD led's and using PMMA lenses, it creates natural looking warm light. Our popular downlight series are dimmable by 0-10V, PWM, Triac and DALI



WK LED BL 1W


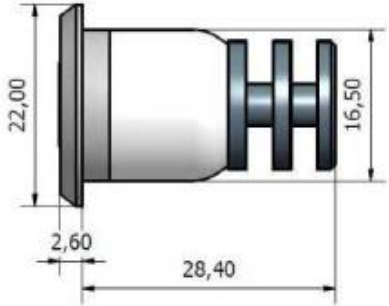
Benefits:

Very low decay 5050 power SMD led's
Also available with Cree led's
Usefull lifetime > 50.000 hours
Dimmable 0-10V / PWM / Triac and DALI
View angle 160 degrees
IP44 indoor / IP67 outdoor
Small size:
Warm white from 2700K up to 4000K
Other colours: regular White, Red, Green, Blue and RGB

Applications:

Luxury interiors and exteriors
Stairsteps, etc.etc..
Suitable for Indoor and outdoor use

Specifications:

WK LED BL-1W	Description	Accessories
	<p>Led's: SMD 5050, 1W Power: 24V or 230V Cut size: 16,5mm Lens: PMMA Lumen: 100 Dimming: 0-10V/PWM/TRIAC/DALI Colour index (Ra): >85 View angle: 160 deg. IP value: IP44 indoor / IP67 outdoor Housing: Aluminium Outer ring: Aluminium brushed, 316 Steel brushed or polished Colours: Warm white, White, Red, Green, Blue and RGB Warranty: up to 3 years</p>	<p>LED driver LED dimmer/driver LED dimmer</p> 



Recessed Courtesy Lights

This product line sets itself apart by using SMD led's and using PMMA lenses, it creates natural looking warm light
Our popular downlight series are dimmable by 0-10V, PWM, Triac and DALI



WK LED B68-CL

Benefits:

Very low decay 3528 SMD led's
Also available with Cree led's
Usefull lifetime > 50.000 hours
Dimmable 0-10V / PWM / Triac and DALI
View angle 90 degrees, half shut
IP44 indoor / IP67 outdoor
Small size:
Warm white from 2700K up to 4000K
Other colours: regular White, Red, Green, Blue and RGB

Applications:

Luxury interiors and exteriors
Suitable for Indoor and outdoor use

Specifications:

WK LED B68-CL	Description	Accessories
	<p>Led's: SMD 3528, 3W Power: 280mA, 24V or 230V Cut size: 50mm Lens: PMMA Lumen: 150 Dimming: 0-10V/PWM/TRIAC/DALI Colour index (Ra): >85 View angle: 90 deg. IP value: IP44 indoor / IP67 outdoor Housing: Aluminium Outer ring: Aluminium brushed, 316 Steel brushed or polished Colours: Warm white, White, Red, Green, Blue and RGB Warranty: up to 3 years</p>	<p>LED driver LED dimmer/driver LED dimmer</p> 



Recessed downlights

This product line sets itself apart by using SMD led's and using PMMA lenses, it creates natural looking warm light
Our popular downlight series are dimmable by 0-10V, PWM, Triac and DALI



WK LED BL 3W-5W






Benefits:

- Very low decay 3528 SMD led's
- Also available with Cree led's
- Usefull lifetime > 50.000 hours
- 54(3w)/72(5w) led's
- Dimmable 0-10V / PWM / Triac and DALI
- View angle 160 degrees
- IP44 indoor / IP67 outdoor
- Small depth: 25mm (3w)/ 37mm (5w)
- Warm white from 2700K up to 4000K
- Other colours: regular White, Red, Green, Blue and RGB

Applications:

- Luxury interiors and exteriors
- Almost endless applications
- Suitable for Indoor and outdoor use

Specifications:

WK LED BL-3W	Description	Accessories
 	<p>Led's: SMD 3528 / 54 pcs. Power: 350mA or DC 24V Cut size: 50mm / 45mm (adjustable) Lens: PMMA Lumen: 300 Dimming: 0-10V/PWM/TRIAC/DALI Colour index (Ra): >85 View angle: 160 deg. IP value: IP44 indoor / IP67 outdoor Housing: Aluminium Outer ring: Aluminium brushed, 316 Steel brushed or polished Colours: Warm white, White, Red, Green, Blue and RGB Warranty: up to 3 years</p>	<p>LED driver LED dimmer/driver LED dimmer</p> <p>Adjustable version:</p> 
WK LED BL-5W	Description	Accessories
 	<p>Led's: SMD 3528 / 72 pcs. Power: 350mA or DC 24V Cut size: 74,5mm Lens:PMMA Lumen: 500 Dimming: 0-10V/PWM/TRIAC/DALI Colour index (Ra): >85 View angle: 160 deg. IP value: IP44 indoor / IP67 outdoor Housing: Aluminium Outer ring: Aluminium brushed, 316 Steel brushed or polished Colours: Warm white, White, Red, Green, Blue and RGB Warranty: up to 3 years</p>	<p>LED driver LED dimmer/driver LED dimmer</p>

Stemerdingweg 12 | 3769 CE Soesterberg | The Netherlands

Tel:+31-346331777| Mob:+31-649305050 | Fax:+31-346350770 | www.wkled.nl



Recessed downlights

Our latest developed products!

The light effect of halogen in LED!

Our popular downlight series are dimmable by 0-10V, PWM, Triac and DALI



WK LED RL 3W/5W


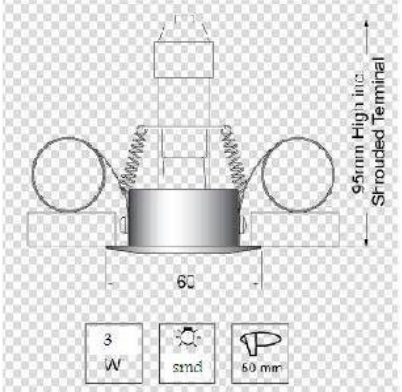

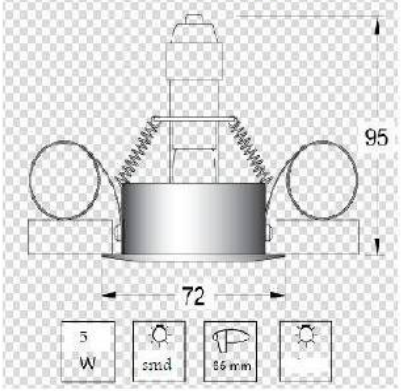
Benefits:

- Very low decay POWER SMD led's
- Also available with Cree led's
- Usefull lifetime > 30.000 hours
- Dimmable 0-10V / PWM / Triac and DALI
- View angle 90 degrees
- IP55
- Depth: 95mm
- Warm white from 2700K up to 4000K
- Other colours: regular White, Red, Green, Blue and RGB

Applications:

- Luxury interiors, also for wet area's
- Almost endless applications
- Suitable for Indoor use

Specifications:

WK LED RL-3	Description	Drawing
	<p>Led's: power SMD 3W Power: 3W at 24V or 230V Cut size: 50mm Lightsource: recessed with mirror Lens: PMMA Lumen: 300 Dimming: 0-10V/PWM/TRIAC/DALI Colour index (Ra): >85 View angle: 90 deg. IP value: IP55 Housing: Aluminium Outer ring: Aluminium brushed, 316 Steel brushed or polished Colours: Warm white, White, Red, Green, Blue and RGB Warranty: up to 3 years</p>	
WK LED RL-5	Description	Drawing
	<p>Led's: power SMD 5W Power: 5W at 24V and 230V Cut size: 65mm Lightsource: recessed with mirror Lens: PMMA Lumen: 500 Dimming: 0-10V/PWM/TRIAC/DALI Colour index (Ra): >85 View angle: 90 deg. IP value: IP55 Housing: Aluminium Outer ring: Aluminium brushed, 316 Steel brushed or polished Colours: Warm white, White, Red, Green, Blue and RGB</p>	

Stemerdingweg 12 | 3769 CE Soesterberg | The Netherlands

Tel:+31-346331777 | Mob:+31-649305050 | Fax:+31-346350770 | www.wkled.nl



Recessed downlights

Our latest developed products!

The light effect of halogen in LED!

Adjustable

Our popular downlight series are dimmable by 0-10V, PWM, Triac and DALI



WK LED RL-A 3W/5W

Benefits:

Very low decay POWER SMD led's

Also available with Cree led's

Usefull lifetime > 30.000 hours

Dimmable 0-10V / PWM / Triac and DALI

View angle 60 degrees

IP55

Depth: 95mm

Warm white from 2700K up to 4000K

Other colours: regular White, Red, Green, Blue and RGB


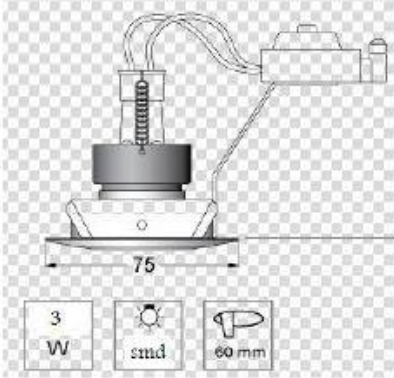

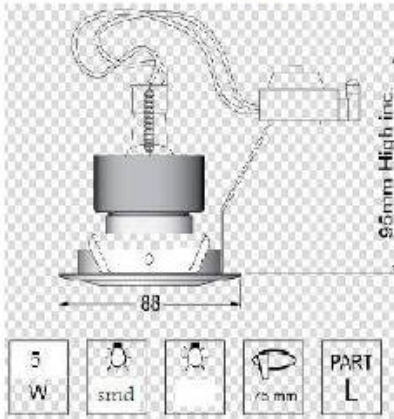
Applications:

Luxury interiors, also for wet area's

Almost endless applications

Suitable for Indoor use

Specifications:

WK LED RL-A3	Description	Drawing
	<p>Led's: power SMD 3W Power: 3W at 24V or 230V Cut size: 60mm Lightsource: recessed, adjustable Lens: PMMA Lumen: 300 Dimming: 0-10V/PWM/TRIAC/DALI Colour index (Ra): >85 View angle: 90 deg. IP value: IP55 Housing: Aluminium Outer ring: Aluminium brushed, 316 Steel brushed or polished Colours: Warm white, White, Red, Green, Blue and RGB Warranty: up to 3 years</p>	
WK LED RL-A5	Description	Drawing
	<p>Led's: power SMD 5W Power: 5W at 24V and 230V Cut size: 75mm Lightsource: recessed, adjustable Lens: PMMA Lumen: 500 Dimming: 0-10V/PWM/TRIAC/DALI Colour index (Ra): >85 View angle: 90 deg. IP value: IP55 Housing: Aluminium Outer ring: Aluminium brushed, 316 Steel brushed or polished Colours: Warm white, White, Red, Green, Blue and RGB</p>	

Stemerdingweg 12 | 3769 CE Soesterberg | The Netherlands

Tel:+31-346331777 | Mob:+31-649305050 | Fax:+31-346350770 | www.wkled.nl



Recessed downlights

This product line sets itself apart by using SMD led's and using PMMA lenses, it creates natural looking warm light
Our popular downlight series are dimmable by 0-10V, PWM, Triac and DALI



WK LED BL 10W /15W



Benefits:

Very low decay 3528 SMD led's
Also available with Cree led's
Usefull lifetime > 50.000 hours
10W / 15W
Dimmable 0-10V / PWM / Triac and DALI
View angle 160 degrees
IP44 indoor / IP67 outdoor
Warm white from 2700K up to 4000K
Other colours: regular White, Red, Green, Blue and RGB

Applications:

Interior and exterior
Almost endless applications
Suitable for Indoor and outdoor use

Specifications:

WK LED BL-10W	Description	Accessories
	Led's: SMD 3528 Power: 220V / 10W Cut size: 80mm Outer size: 120mm Lens: PMMA Lumen: 1000 Dimming: 0-10V/PWM/TRIAC/DALI Colour index (Ra): >85 View angle: 160 deg. IP value: IP44 indoor / IP 67 outdoor Housing: aluminium	LED driver LED dimmer/driver LED dimmer
WK LED BL-15W	Description	Accessories
	Led's: SMD 3528 Power: 220V / 15W Cut size: 90mm Outer size: 120mm Lens:PMMA Lumen: 1500 Dimming: 0-10V/PWM/TRIAC/DALI Colour index (Ra): >85 View angle: 160 deg. IP value: IP44 indoor / IP67 outdoor Housing: aluminium	LED driver LED dimmer/driver LED dimmer